


Spike Spot

Cat. No. SS

Cat. No. SSGU

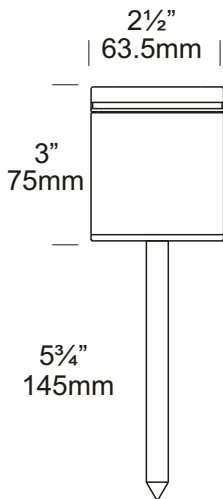

The Spike Spot is inserted into the ground and can be easily aimed by angling the luminaire in the desired direction. This fixture uses an MR16 lamp and is ideal for illuminating bushes and trees from ground level.

The luminaire is machined from a choice of 10mm solid aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush fit glass lens and high temperature silicone gaskets.

A GU10 version of this luminaire is also available for line voltage lamps. However, a longer luminaire body is needed to accommodate the longer lamp.

Ordering Information

Luminaire Type

- SS - Spike Spot
- SSGU - Spike Spot GU10

Material/Finish

- BK - Black
- BZ - Bronze
- CT - Corten
- DG - Dark Grey
- OG - Olive Green
- STAR - Silver Star
- WB - White Birch
- WH - White
- COP - Copper
- SS - Stainless Steel

Accessories

- CJK150 - Cable Joint Kit
- GG - Glare Guard
- HCL - Hex Cell Louvre
- LENSSTEPF - Frosted Lens
- /300 - Ground Spike 300mm (12")

Ordering example: SS BK - Spike Spot in Black
 SSGU COP - Spike Spot in Copper
 LENSSTEPF - Frosted Lens
 (accessories ordered separately)

Luminaire Construction

CNC machined from one of the following metals:

Aluminium

High corrosion resistant aluminium with chromate substrate and high UV resistant powder coat.

Body: 63.5mm (2½") x 10mm (3/8") tube.

End cap: solid aluminium 63.5mm (2½") rod.

Spike: 150mm (6") x 11mm (1/2") aluminium rod.

Colours:

Black, Bronze, Corten, Dark Grey, Olive Green, Silver Star, White Birch, White.

Copper

Body: 63.5mm (2½") x 10mm (3/8") tube.

End cap: solid copper 63.5mm (2½") rod.

Spike: 150mm (6") x 11mm (1/2") copper rod.

316 Stainless Steel

Body: 63.5mm (2½") x 10mm (3/8") tube.

End cap: solid stainless steel 63.5mm (2½") rod.

Spike: 150mm (6") x 11mm (1/2") stainless steel rod.

Mounting

Ground spike 150mm (6") or 300mm (12") directly into the earth.

Features

Lens

10mm (3/8") clear flush fit shatter resistant glass.

Lifetime Warranty.

Gasket

Silicone, iron impregnated 220°C (428°F).

Lamp Holder

MR16 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

Accessories

Cable Joint Kit (Cat CJK150). Not approved for USA/Canada.


Glare Guard (Cat. GG).

Hex Cell Louvre (Cat. HCL).

Frosted Lens (Cat. LENSSTEPF).

300mm (12") Spike (Cat. /300).

Standards

IP66, UL1838, 

Luminaire Weight

Aluminium - 0.450kg (15oz)

Copper - 1.250kg (2lb 12oz)

Stainless Steel - 0.960kg (2lb 1oz)

Power Supply

Hunza Inground or Wall Mount

Transformer: not included.

USA and Canada

Hunza Wall Mount Transformer: not included.

Lamp Options










MR16 - 20 or 35 watt lamp max.

GU10 - 25 or 35 watt lamp max.

USA and Canada

MR16 - 20 watt lamp max.

GU10 - lamp not supplied.

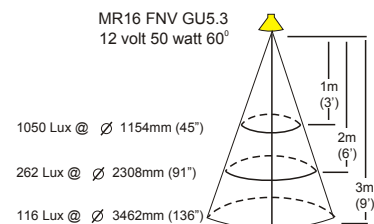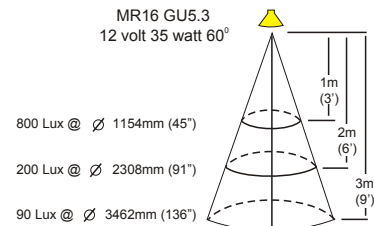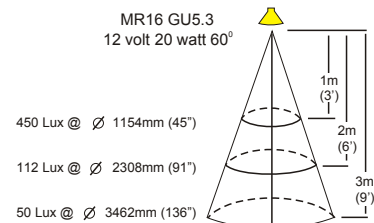

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
<http://www.hunzalighting.com/contact.php>
Specification may change without notice.
Manufactured in New Zealand.
© 2016 Hunza Holdings Ltd.