HUNZA™ PURE OUTDOOR LIGHTING

Oak Bollard
fitted with Hunza Mouse Lite Pure LED

PROJECT:

TYPE:


SOURCE:

NOTES:

PURELED SPECIFICATIONS CE cULus LISTED

LED Chip	Cree XPG-3 Plug and Play field replaceable LED board
Luminaire Output	120 Lumens @ 700mA (2 watts), delivered from luminaire with unobstructed beam.
Lumens Per Watt	60 Lumens minimum @ 2 watts, delivered from luminaire with unobstructed beam
CRI (3000K)	85+ Standard, 90+ Optional
Colour Temperatures	2700K, 3000K, 4000K
Beam Angles	120 degrees
Ingress Protection	IP66

Warranty	Electronics = 5 years Body SS/SBZ = 10 years
Standards	AS/NZS 61046, EN60598 cUL 1838, 2108 CSA C22.2 No.250.7, No.250.0-08 CE

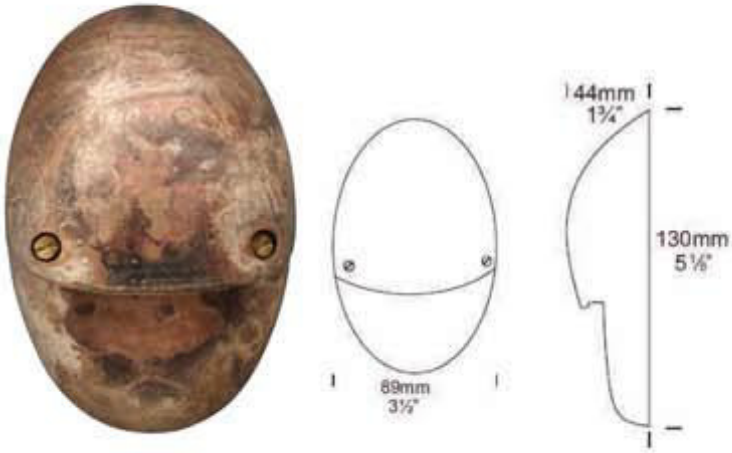

PRODUCT CONFIGURATION

Cat. No. MOUSE/L

Luminaire	Power	Material/ Finish	Beam	Colour
MOUSE/L				

Power
- S — SERIES, REMOTE DRIVER
- B3 — 12VAC, 350mA 1W INTEGRAL
- B7 — 12VAC, 700mA 2W INTEGRAL

Material/ Finish
- SBZ — SOLID BRONZE
- SS — STAINLESS STEEL

Beam
- 120 — 120°

Colour
- 2 — 2700K
- 3 — 3000K
- 4 — 4000K
- 39 — 3000K, 90+ CRI

Accessories
- CJK — CABLE JOINT KIT

SERIES, REMOTE DRIVER REQUIRED:
Constant current driver
Individual fixtures require 3vdc @ 700mA maximum

12VAC INTEGRAL DRIVER:
Buck Bullet Driver (included)
Input:12VAC, 3watt @ total
Output: 3vdc nominal @
B3=350mA, B7=700mA



OTHER LAMP OPTIONS:
MOUSE/H - G4 Halogen 12V Lamp
MOUSE/GL - G4 LED Retrofit 12V Lamp (lamps vary by market - please refer to supplier for details)

Click here for Remote Power Supply Guidance Charts

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: +64-9-528 9471
Fax: +64-9-528 9361
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
http://www.hunzalighting.com/contact.php

Specifications may change without notice. This document contains proprietary information of Hunza. Its receipt or possession does not convey an rights to reproduce or disclose its content.