

# Spike Spot Adjustable

Cat. No. SS/A

Cat. No. SS/AGU



The Spike Spot Adjustable has been designed for easy installation into the earth and is ideal for illuminating a bush, tree or any landscape feature. The fully adjustable head allows 360 degree rotation and 0 - 90 degree elevation.

This luminaire is machined from a choice of 10mm solid aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush fit, glass lens and high temperature silicon gaskets.

A GU10 version of this luminaire is also available for line voltage lamps. However, a longer luminaire body is needed to accommodate the longer lamp.

## Ordering Information

### Luminaire Type

SS/A - Spike Spot Adjustable  
 SS/AGU - Spike Spot Adjustable  
 GU10


### Material/Finish

BK - Black  
 BZ - Bronze  
 CT - Corten  
 DG - Dark Grey  
 OG - Olive Green  
 STAR - Silver Star  
 WB - White Birch  
 WH - White  
 COP - Copper  
 SS - Stainless Steel

### Accessories

CJK150 - Cable Joint Kit  
 GG - Glare Guard  
 HCL - Hex Cell Louvre  
 LENSSTEPF - Frosted Lens  
 /300 - Ground Spike  
 300mm (12")

Ordering example: SS/A BK - Spike Spot Adjustable in Black  
 SS/AGU COP - Spike Spot Adjustable in Copper  
 LENSSTEPF - Frosted Lens  
 (accessories ordered separately)

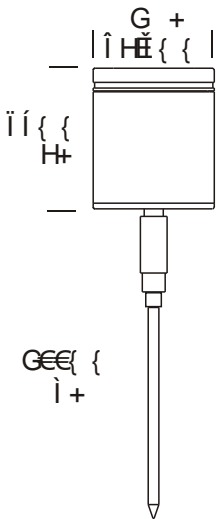

## Luminaire Construction

**CNC machined from one of the following metals:**

### Aluminium

High corrosion resistant aluminium with chromate substrate and high UV resistant powder coat.

Body: 63.5mm (2½") x 10mm (3/8") tube.

End cap: solid aluminium 63.5mm (2½") rod.

Spike: 150mm (6") x 11mm (1/2") aluminium rod.

Colours:

Black, Bronze, Corten, Dark Grey, Olive Green, Silver Star, White Birch, White.

### Copper

Body: 63.5mm (2½") x 10mm (3/8") tube.

End cap: solid copper 63.5mm (2½") rod.

Spike: 150mm (6") x 11mm (1/2") copper rod.

### 316 Stainless Steel

Body: 63.5mm (2½") x 10mm (3/8") tube.

End cap: solid stainless steel 63.5mm (2½") rod.

Spike: 150mm (6") x 11mm (1/2") stainless steel rod.

## Mounting

Ground spike 150mm (6") or 300mm (12") directly into the earth.

## Features

### Lens

10mm (3/8") clear flush fit shatter resistant glass.

Lifetime Warranty.

### Gasket

Silicone, iron impregnated 220°C (428°F).

### Lamp Holder

MR16 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

## Accessories

**Cable Joint Kit** (Cat CJK150). Not approved for USA/Canada.

**Glare Guard** (Cat. GG).

**Hex Cell Louvre** (Cat. HCL).

**Frosted Lens** (Cat. LENSSTEPF).


**300mm (12") Spike** (Cat. /300).

## Swivel

**Aluminium and Copper luminaires** - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

**Stainless Steel luminaires** - 360° rotation and 0 - 90° elevation, full stainless steel construction.

## Standards

IP66, UL1838, 

## Luminaire Weight

**Aluminium** - 0.490kg (1lb 1oz)

**Copper** - 1.240kg (2lb 11oz)

**Stainless Steel** - 1.080kg (2lb 6oz)

## Power Supply

Hunza Inground or Wall Mount Transformer: not included.

USA and Canada

Hunza Wall Mount Transformer: not included.

## Lamp Options










MR16 - 20 or 35 watt lamp max.

GU10 - 25 or 35 watt lamp max.

USA and Canada

MR16 - 20 watt lamp max.

GU10 - lamp not supplied.



**HUNZA**™ PURE OUTDOOR LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunzalighting.com

INTERNATIONAL CONTACTS:  
<http://www.hunzalighting.com/contact.php>  
Specification may change without notice.  
Manufactured in New Zealand.  
© 2016 Hunza Holdings Ltd.