


Project _____
 Type _____
 Source _____
 Notes _____

SPECIFICATIONS

| | |
|----------------------------|---|
| LED Chip | Cree CXB 1512 field replaceable LED board |
| Luminaire Output* | 1200 lumens @ 700mA (12W) |
| Lumens Per Watt* | 100 lumens @ 12W minimum |
| LED Life Expectancy | 50,000 hours L70 |
| CRI (3000K) | 90+ |
| Ingress Protection | IP66 |
| Warranty | Electronics = 5 years (Excludes third party lamps and power supplies) Aluminium = 5 years |
| Standards | CE IEC/BS/AS/NZ 60598 UL 1598 UL 2108 |

*Delivered from the luminaire with an unobstructed beam

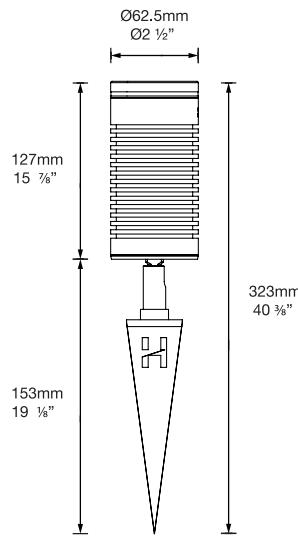

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Luminaire

ST/HP

| Power | Material/Finish | Beam | Colour | Accessories |
|---|---|--|--|---|
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> |
| SR Constant Current Input, Series Wired, 12W Remote Constant Current 0-10V Dimmable Driver (supplied). Fixture Input: 18Vf @ 700mA maximum. | Aluminium Powder Coat Colours EBK Black EBZ Bronze EOGR Olive green EWH White EWB White Birch EDG Dark Grey ESTAR Silver Star ECT Corten FS Fine Silver | 15 15 Degrees 30 30 Degrees 40 40 Degrees 70 70 Degrees | 2 2700K 3 3000K 4 4000K | LF Frosted Lens HCL Hex Cell Louvre GG Glare Guard SNT Snoot |
| S Constant Current Input, Series Wired, 12W Requires Constant Current Driver (not supplied). Fixture Input: 18Vf @ 700mA maximum. | | | | |
| D24 24VDC Input, Parallel Wired, 12W Requires 24VDC Constant Voltage Power Supply (not supplied). Fixture Input: 24VDC, 12W (700mA). | | | | |

LUMINAIRE INFORMATION

CNC machined from the following materials

Powder Coated Aluminium

Virgin, high corrosion resistant, low copper content (0.001%) aluminium with chromate substrate, and a highly UV-resistant polyester powder coat.

Gaskets

Silicone, iron impregnated 220°C (428°F).

Step Lens

10mm (3/8") extra clear, low iron, shatter resistant glass. Lifetime warranty.


Mounting

Insert stake directly into the earth


Luminaire Weight

1.000 kg (2lb 3oz)


ACCESSORIES



Hex Cell Louvre







Glare Guard



Snoot

BEAM ANGLES

High efficiency reflector lenses. Field replaceable



15°



30°



40°




70°

WIRING GUIDE

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.

Circuit: Constant Current - Wired in Series

Please see installation instructions for full details.

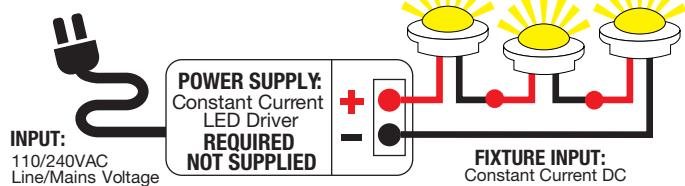

Circuit: 24VDC - Wired in Parallel

Please see installation instructions for full details.

